

# Central Brass

C O M P A N Y

Brecksville, Ohio 44141

Phone: (216) 883-0220 Fax: (440) 526-5745

www.CentralBrass.com

**MODEL NOS.**  
**0047-UA    80047-UA**  
**SINK FIXTURE**

O-Ring Compression    1/4-Turn Compression    Ceramic Units  
**0047-UA**                    **0047-UA-Q**                    **80047-UA**


The wall mounted sink fitting is designed with a solid cast brass body with replaceable seats. The flanges are all brass and have 1/2-inch female pipe connections. The inlet supply location is adjustable by rotating the flange to obtain a 1/4-inch center variation. The 6-inch spout has a water saving aerator that limits the flow. The stems are all brass, with a double O-Ring seal and rubber seat washer (for compression stems) or ceramic sealing discs (for ceramic units). The canopy handles are zinc die cast with a chrome plated finish. The faucet and flanges are polished and copper, nickel, and chrome plated.



Flow Rate: 2.0 GPM @ 60 psi  
ADA Compliant and Meets ASME A112.18.1M  
Certified by IAPMO R&T to NSF/ANSI 61



## Installation Drawing

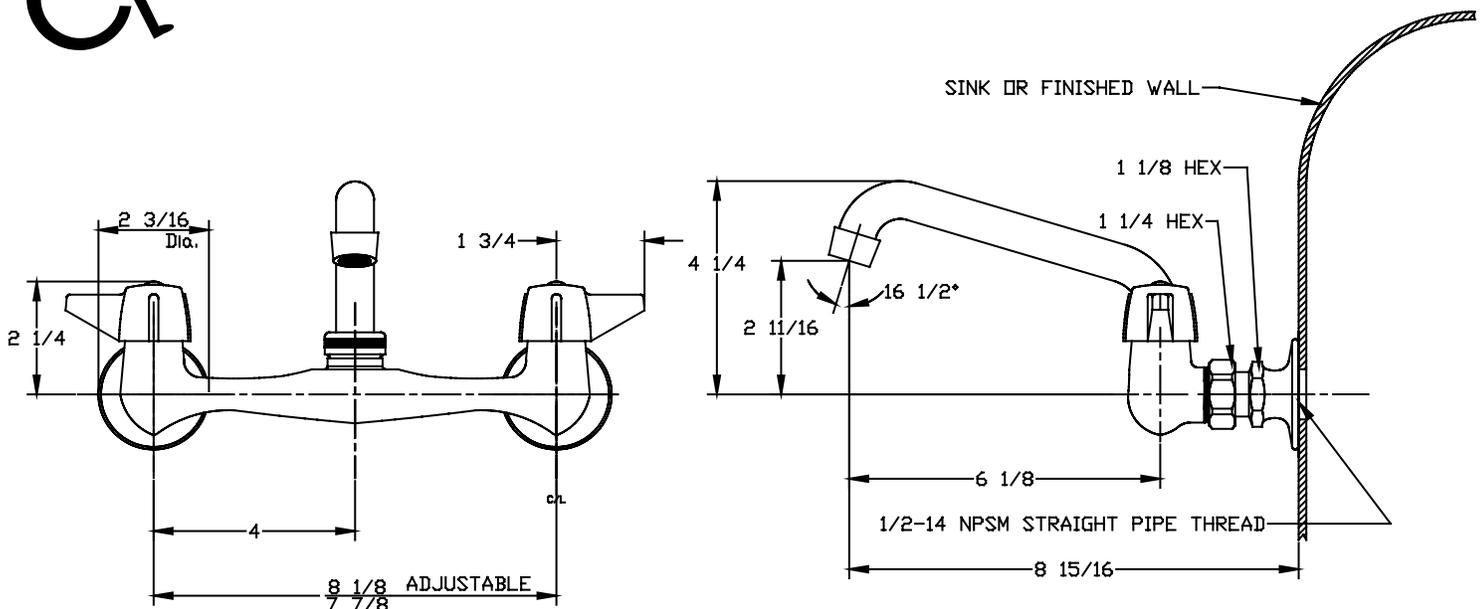

# Central Brass

COMPANY

Brecksville, Ohio 44141

Phone: (216) 883-0220 Fax: (440) 526-5745

www.CentralBrass.com

**MODEL NOS.**  
**0047-UA 80047-UA**  
**SINK FIXTURE**

## Handle variations available

ELS - Suffix  
Wrist 4-inch  
EL - Suffix  
Elbow 6-inch




G-4147 (4-inch)  
G-4149 (6-inch)

## Spout variations available


- A1 - Suffix  
8-inch Brass Tube Spout
- A2 - Suffix  
10-inch Brass Tube Spout
- A3 - Suffix  
12-inch Brass Tube Spout
- A4 - Suffix  
14-inch Brass Tube Spout

H - Suffix replaces A for hose end

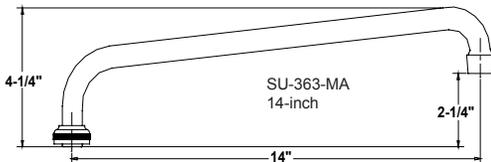


- A6 - Suffix  
8-inch Brass D-Spout

H - Suffix replaces A for hose end

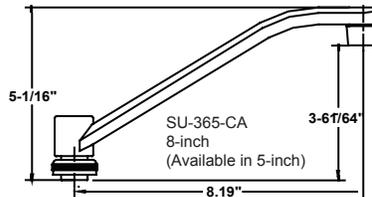


- GSA - Suffix  
4 3/32 Swivel Gooseneck Spout
- GRA - Suffix  
4 3/32 Rigid Gooseneck Spout

H - Suffix replaces A for hose end

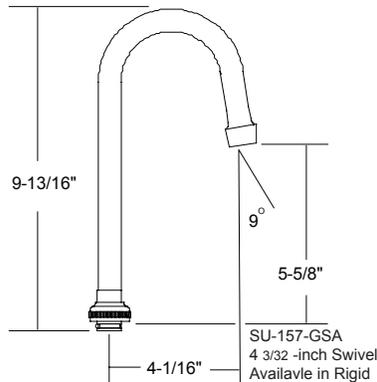


- A9 - Suffix  
5-inch Cast Brass Spout

H - Suffix replaces A for hose end

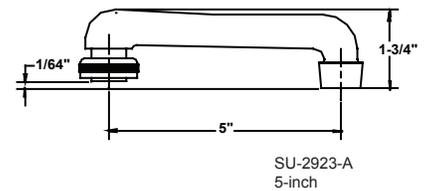


- KSA - Suffix  
5 1/2 Swivel Gooseneck Spout
- KRA - Suffix  
5 1/2 Rigid Gooseneck Spout

H - Suffix replaces A for hose end

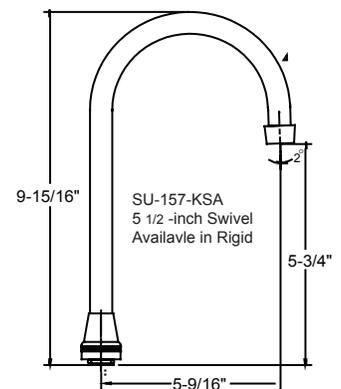

Cast Brass Spout  
Extension  
Accessory

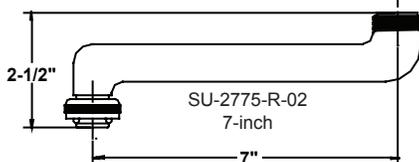

Faucets with lever, wrist or elbow handles with compression or ceramic stem cartridges are ADA compliant.



# Central Brass

C O M P A N Y

Brecksville, Ohio 44141

Phone: (216) 883-0220 Fax: (440) 526-5745

www.CentralBrass.com

MODEL NOS.


**0047-UA**

**SINK FIXTURE**

## Parts Breakdown

#	Part #	Description
1	2831-CP	Brass Faucet Body
2	263-BC	Bronze Seat
3	1028-Y	Nylon Gasket
4	104	Brass Seat Washer
5	901-WNN	Seat Washer
6	453-FL	Brass Left Thread O-Ring Stem
6	453-FR	Brass Right Thread O-Ring Stem
7	1038-453	O-Ring
8	453-EWC	Brass Left Thread O-Ring Bonnet
8	453-EWH	Brass Right Thread O-Ring Bonnet

#	Part #	Description
9	523-C	Handle Indexed "C"
9	523-H	Handle Indexed "H"
10	107-F	Brass Phillips Head Screw
11	1038-KN	O-Ring
12	166-FN	Stainless Steel Snap Ring
13	PF-782-D	Brass Spout Nut
14	PF-2924	Brass Swivel Spout
15	30-M	Female Aerator
16	2807	Brass Offset Flange
17	PF-2843-49	Brass Hex Spout Nut
18	PF-256-L	Brass Spud
19	940-TRN	Washer
20	SU-453-EL	Left Thread O-Ring Stem Assembly
20	SU-453-ER	Right Thread O-Ring Stem Assembly
21	SU-2807	Brass Flange Assembly

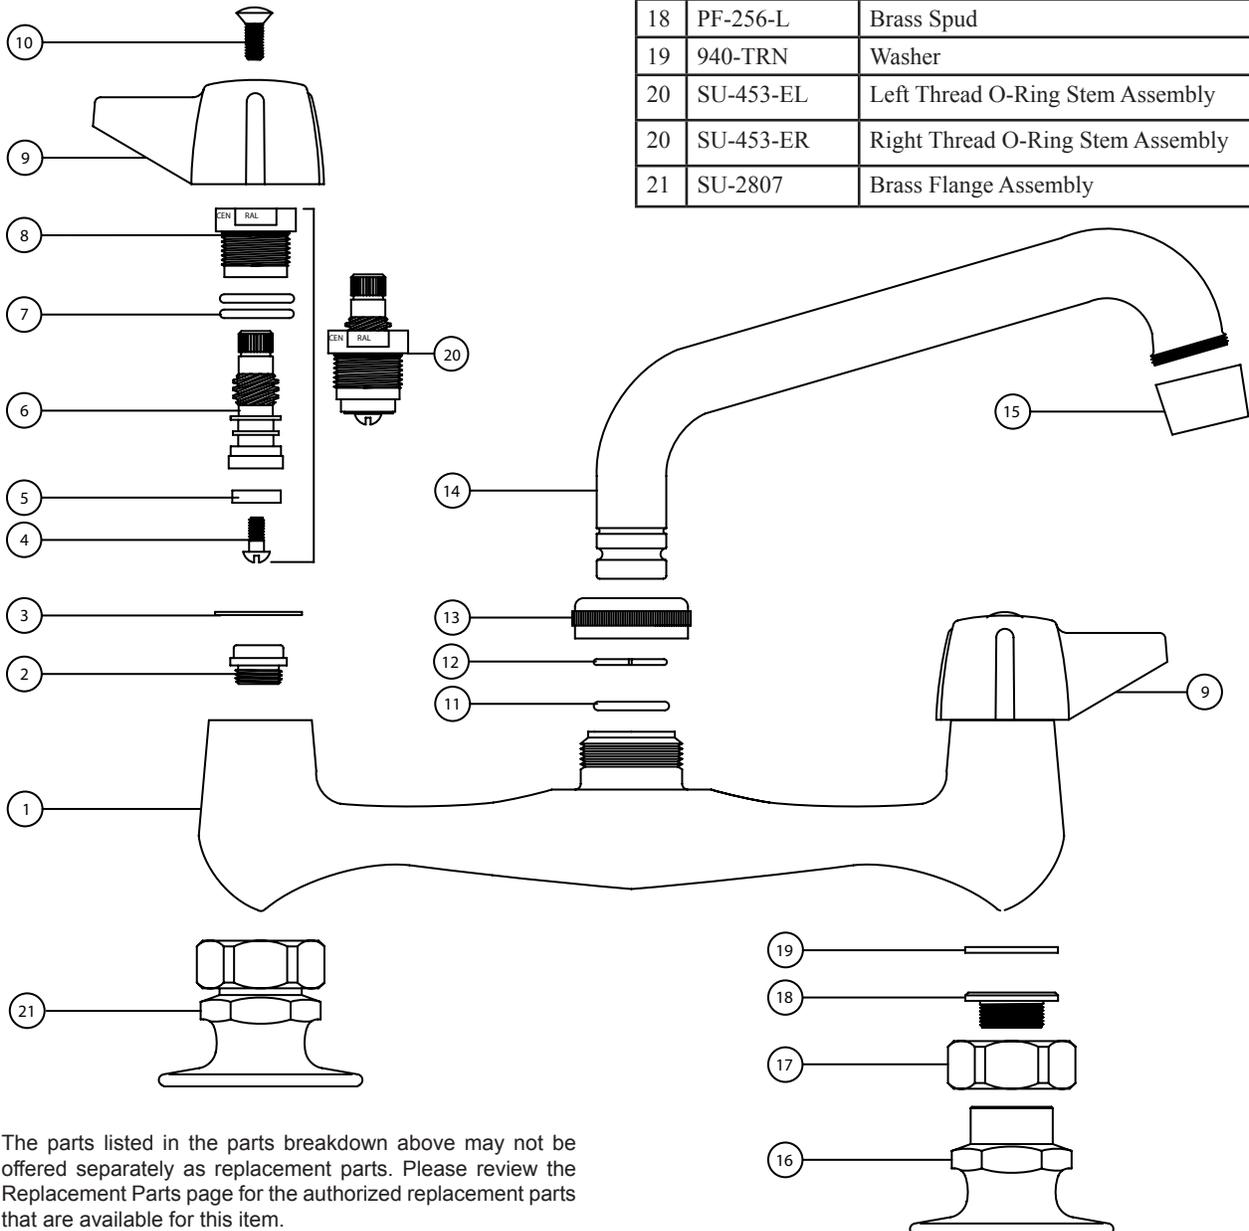

The parts listed in the parts breakdown above may not be offered separately as replacement parts. Please review the Replacement Parts page for the authorized replacement parts that are available for this item.