




Exposed Z6000AV-WS1-DF Dual Flush Model Flush Valve For Water Closets

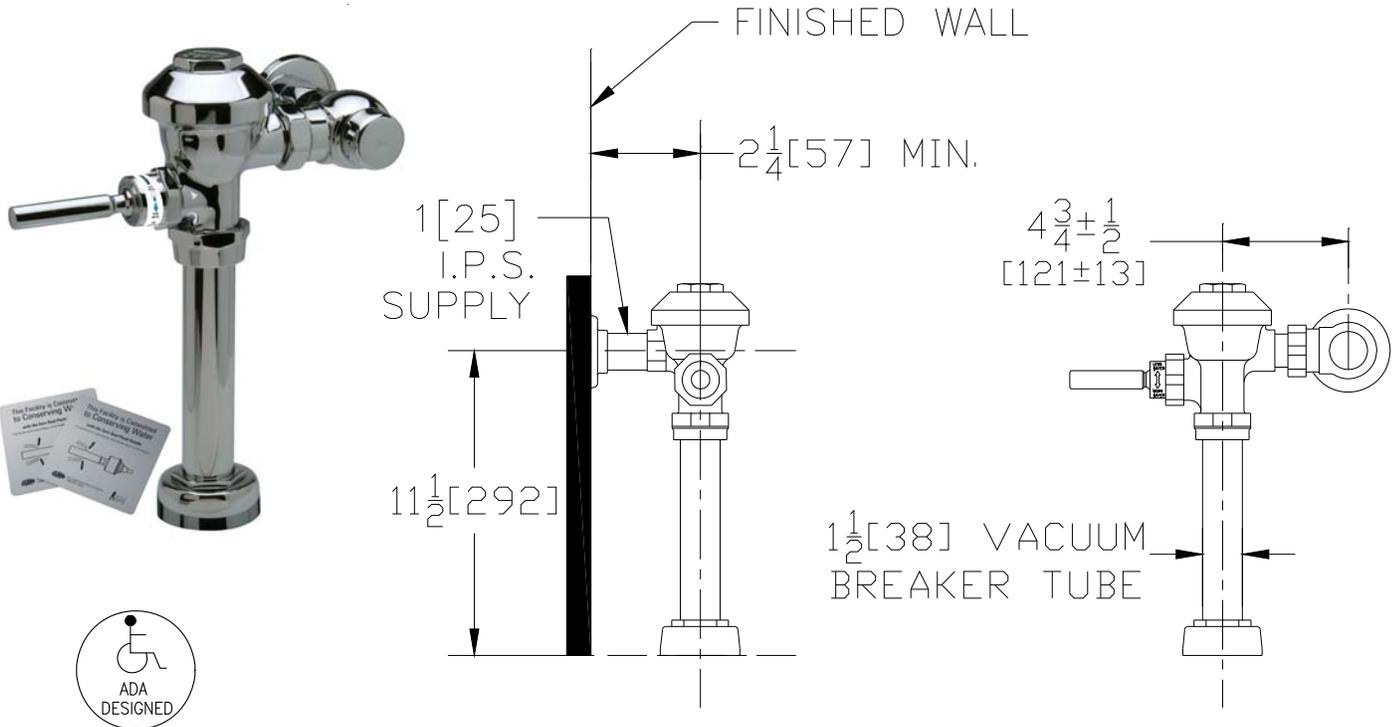

Flow Options

- WS1 Low Consumption Flush (1.6/1.1)

Suffix Options (Check/Specify Appropriate Options)

- YJ Split Ring Pipe Support
- YK Solid Ring Pipe Support
- YO Bumper on Angle Stop
- Other



www.GreenSpec.com

This space is for Architectural/Engineering Approval

ENGINEERING SPECIFICATION: ZURN Z6000AV-WS1-DF Dual Flush AquaVantage® 'AV' Exposed Closet Flush Valve

- Exposed, quiet diaphragm-type, chrome plated flushometer valve with a polished exterior. The valve is ADA compliant with a non-hold open and no leak dual flush handle feature. Lifting the handle up initiates a reduced flush of 30% savings for the evacuation of liquid waste. Pushing the handle down actuates a full flush for solid waste. A wall plate is furnished with graphics and instructions for user operations. The valve incorporates the AquaVantage® TPE, chloramine resistant, dual seal diaphragm with a clog resistant, triple filtered by-pass. The valve also includes a high back pressure vacuum breaker, one piece hex coupling nut, adjustable tail-piece, spud coupling and flange for top spud connection. The control stop has internal siphon-guard protection, vandal resistant stop cap, sweat solder kit, and a cast wall flange with set screw. All seals and gaskets are made of chloramine resistant materials.

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.