



A Moen Incorporated Brand

S P E C I F I C A T I O N S H E E T



**DESCRIPTION**

- Metal construction with various finishes identified by suffix
- Includes 17ga brass or 50/50 waste pop-up type assembly where noted
- 1/2" IPS connections
- Six (6) individual boxes per master carton
- Features red/blue hot/cold temperature indicators

**OPERATION**

- Lever style handles
- Hot side: Turn counterclockwise to open (clockwise to close)
- Cold side: Turn clockwise to open (counterclockwise to close)
- Will operate with less than 5 lbs. of torque
- No grasping motion required to operate the faucet handles

**FLOW**

- Flow is limited to 1.5 gpm max. (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max. (8.3L/min)

**CRITICAL DIMENSIONS**

- Note: This faucet is designed to be installed through 3 holes, 1" minimum diameter outer holes, 4" centers,
- Maximum deck thickness 0.875" (22 mm)
- 6 individual boxes per master carton

**CARTRIDGE**

- Ceramic disc technology
- Non-metallic, non-ferrous, and brass material
- Single body construction for easy replacement
- 1/4 turn movement

**STANDARDS**

- Third party certified to WaterSense® CSA B125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and the Federal Safe Water Drinking Act
- **ADA** ♿ for lever handle

**WARRANTY – RESIDENTIAL, COMMERCIAL**



- Ten year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-4910 for complete warranty information



**Two Handle Lavatory With Metal Waste**

**Models:**

- CA40210 2H Lav with metal waste**
- CA40211 2H Lav with 50/50 waste**
- CA40213 2H Lav less waste**

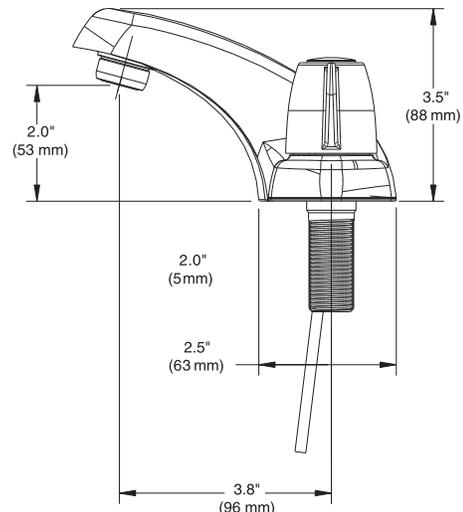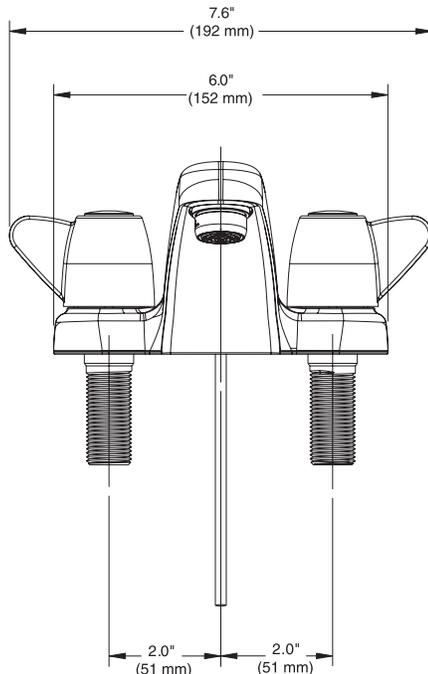

**CRITICAL DIMENSIONS**

(DO NOT SCALE)