

#### Features

- One-piece, self-contained ceramic disc valve which allows both volume and temperature control.
- Temperature memory allows the faucet to be turned on and off at any temperature setting.
- 4-3/8" (111 mm) spout reach.
- Stationary spout.
- Pop-up drain with tailpiece.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

#### Material

- Brass construction.

#### Installation

- For single-hole installation.



ADA

#### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

All applicable US Federal and State material regulations

#### KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

- |  |    |                 |
|--|----|-----------------|
|  | CP | Polished Chrome |
|  | G  | Brushed Chrome  |

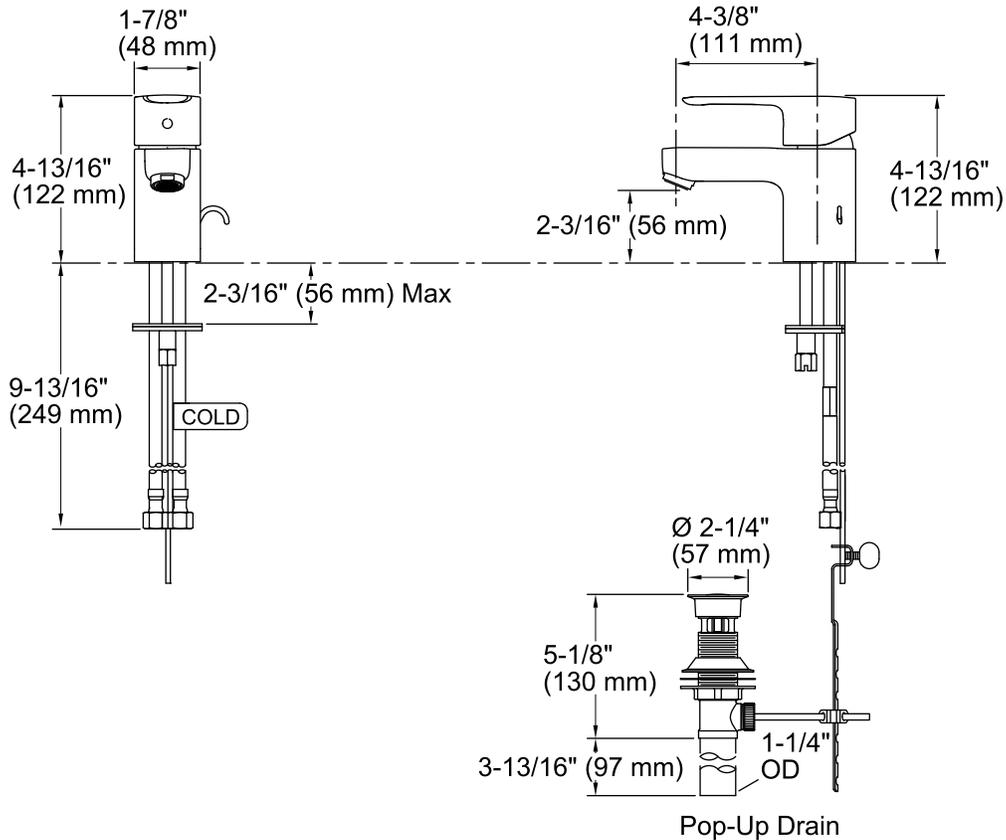

### Technical Information

All product dimensions are nominal.

Spout reach: 4-3/8" (111 mm)

Drain included: YES

Drain tailpiece included: YES

### Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

### Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.