

Features

- Brass construction.
- Wall-mount installation.
- For 8" (203 mm) centers.
- Valvet® valves.
- 12" (305 mm) spout reach.
- Rotating spout.
- Six-prong handles.
- Soap dish.
- Inside threaded couplings.
- Lower flow aerator options are available (refer to the Kohler Price Book).
- 2.2 gal/min (8.3 l/min) maximum flow rate [max at 60 psi (4.14 bar)].



Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
-------	------	-------------



CP Polished Chrome



BN Vibrant® Brushed Nickel

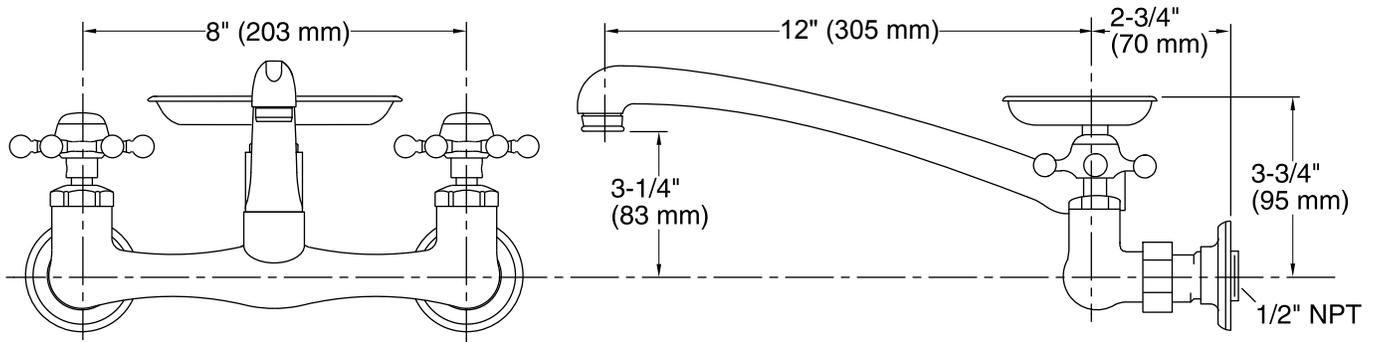

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 12" (305 mm)

Faucet:

Flow rate: 2.2 gal/min (8.3 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.