

### Features

- 4-7/8" (124 mm) diverter spout with slip-fit connection.
- Reversible 1/2" quarter-turn washerless ceramic disc valves.
- Lever handles.
- Includes showerhead, arm and flange.

### Material

- Premium construction ensures durability and reliability.

### Required Accessories

K-302-K 1/2" Ceramic In-Wall Valve System

### Optional Accessories

56373 Deep Rough-in Kit  
56374 Elongated Escutcheons



### Codes/Standards

ASME A112.18.1/CSA B125.1  
ASSE 1016  
DOE - Energy Policy Act 1992

### KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
--	----	-----------------

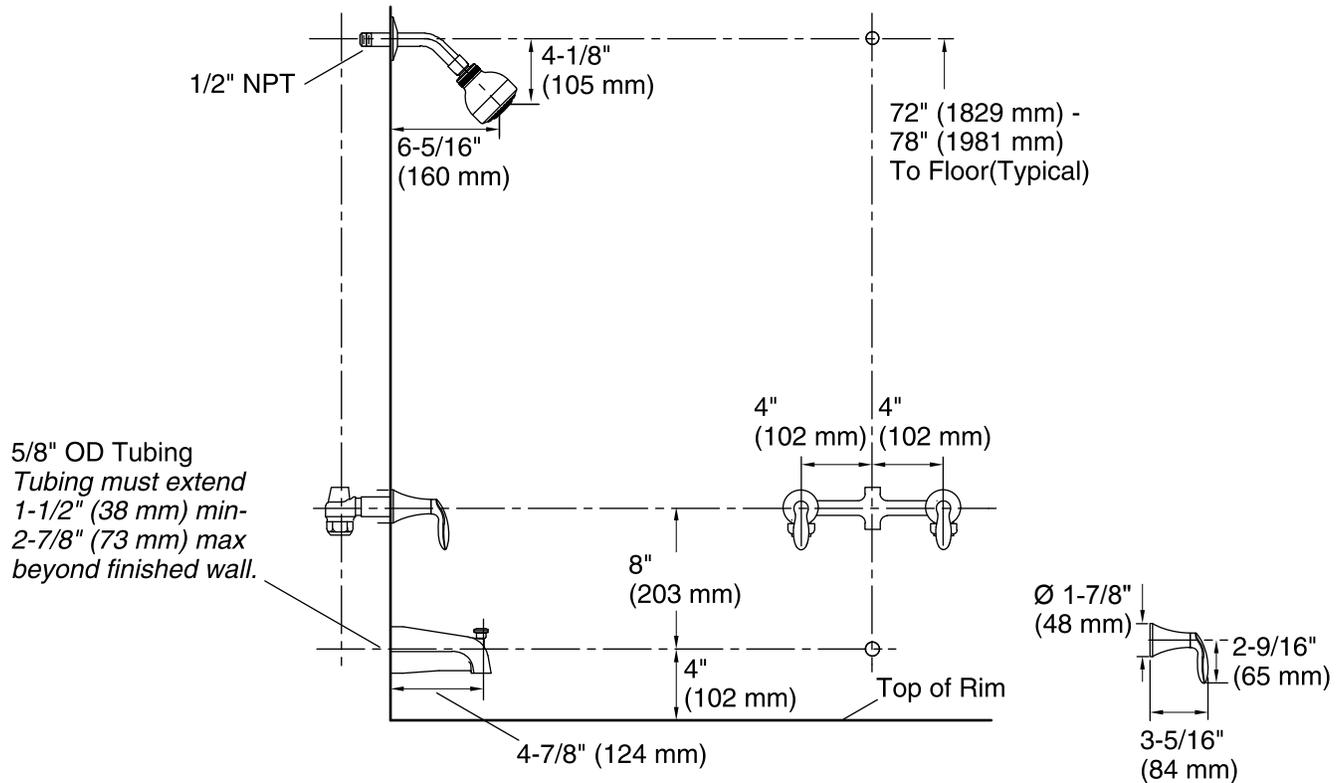

### Technical Information

All product dimensions are nominal.

#### Showerhead:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

### Notes

Install this product according to the installation guide.