SJM

9

IUMBER

AND CHANGE WITHOUT NOTICE


JAY R.
SMITH MFG. CO.
DIVISION OF SMITH INDUSTRIES, INC.
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com

LOCATION

FUNNELS

DRIP AND CONDENSATE FUNNELS

FUNCTION: Ideal for hospitals and industrial laboratories where indirect waste lines above the floor require receptors to receive drip, condensate or waste water. Use of "P" trap recommended for preventing sewer gases from entering room.

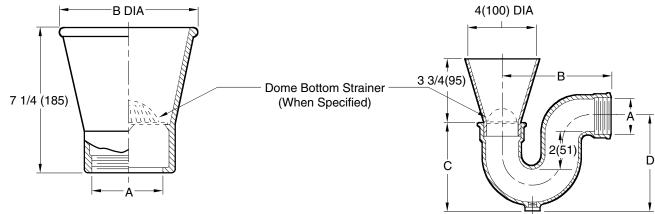

CAULK OUTLET A = PIPE SIZE 02(50) 03(75) 04(100) 06(150) B 6(150) 7(180) 8(205) 10(255)

0150(40), 02(50)	6(150)	5(125)	5 1/2(140)
03(75)	6(150)	6(150)	6(150)

Fig. 3811C ... DUCO CAST IRON WITH ACID RESISTANT ... Fig. 3821T COATED INTERIOR AND EXTERIOR

Fig. 3812C ... DUCO COATED CAST IRON ... Fig. 3822T Fig. 3813C ... CAST BRONZE ... Fig. 3823T Fig. 3814C ... POLISHED CHROME PLATED CAST BRONZE ... Fig. 3824T

REGULARLY FURNISHED: As described by Figure Number.	VARIATIONS: Aluminum Dome Bottom Strainer -DBS Dome Bottom Strainer (Same finish and materials as described by Figure No.)	OPTIONAL MATERIALS: All Galvanized -G
NOTE: Dimensions shown in parentheses are in millimeters.	Less Cleanout (Fig. 3820 Series only) With Front Cleanout (Fig. 3820 Series only) NO-HUB Adaptor 02(50), 03(75), 04(100) or (Specify Fig. 2646Y)	06"(150) sizes only
D. E. 6.11.00 EPoviced deservintion	T Threaded Outlet	

D C B A	6-11-99 5-7-99 8-26-96 7-25-94	Revised description Changed 03(80) to 03(75) Added Millimeters Submittal Update	CMD CMD EMB EMB	BS BS BS BS	_	VOLUME CUBIC FEET	FIGURE NUMBER 3811, 3812, 3813, 3814
REV.	DATE	DESCRIPTION	BY	CKD. BY			3821, 3822, 3823, 3824